


# Bubble Gum


## String Functions (without SubString)




The app works like this:

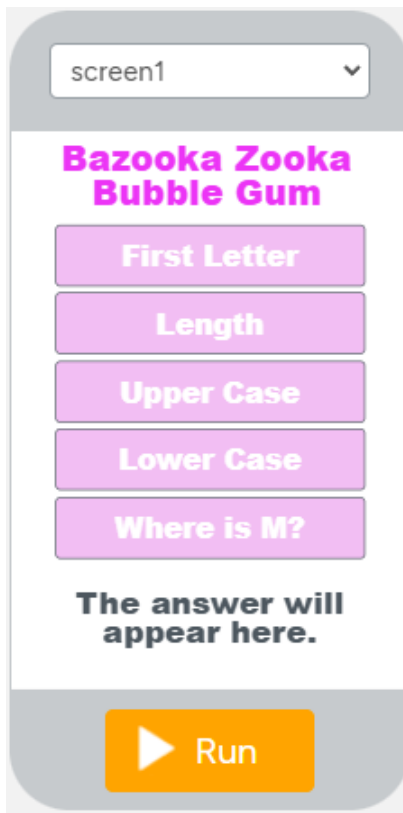

Opening Settings

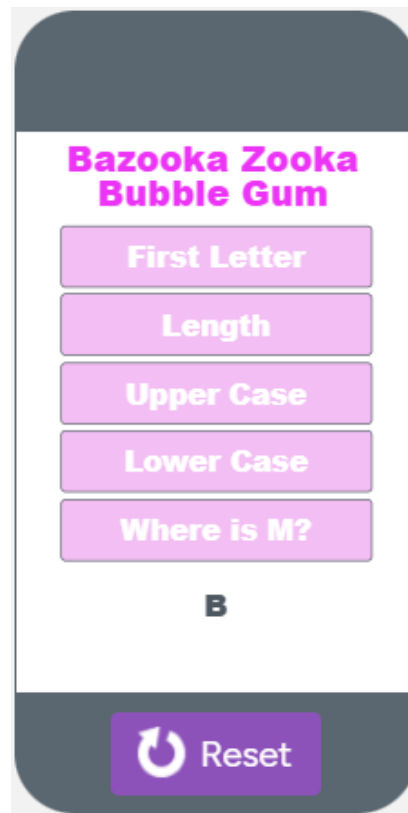

When the First Letter button is pressed.

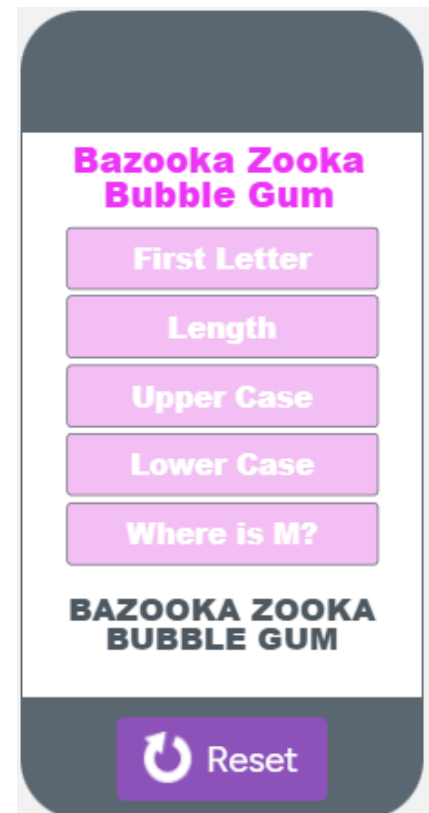

When the Upper Case button is pressed.

The onEvent for the First Letter button is like this:

```
1  onEvent(▼"firstLetter", ▼"click", function(●) {  
2    var b = "Bazooka Zooka Bubble Gum";  
3    setText(▼"answer", b.charAt(0) ← →);  
4  } );
```

The onEvent for the Upper Case button is like this:

```
5  onEvent (▼ "upperCase", ▼ "click", function() {  
6      var b = "Bazooka Zooka Bubble Gum";  
7      setText (▼ "answer", b.toUpperCase());  
8  } );
```

Figure out all of the buttons using the String Functions:

```
var str = "Hello World";
```

```
str.substring(start, end)
```

```
str.indexOf(searchValue)
```

```
str.includes(searchValue)
```

```
str.length
```

```
str.toUpperCase()
```

```
str.toLowerCase()
```